



# Technical data sheet

22.08.2023  
(Version 1)

Marine diesel engine  
D2868LE429 (V8-1000)

## Performance data

Rated power	735	kW
Rated power	1000	PS
Speed	2300	rpm
Bore/Stroke	128/157	mm
Displacement	16,16	liter
Rated torque	3052	Nm
Maximum torque	3345	Nm
at speed	1300-2100	rpm
Compression ratio [ε]	17,0	:1
Mean effective pressure	23,73	bar
Mean piston speed	12,04	m/s



The engine illustrated may not entirely be identical to production standard engine

## Consumption data <sup>2</sup>

Specific fuel consumption <sup>1</sup>	220	g/kWh
Absolute fuel consumption <sup>1</sup>	193	l/h
Lowest fuel consumption <sup>3</sup>	202	g/kWh
Absolute urea consumption <sup>1</sup>	8	l/h

## Engine description

Application	Main propulsion diesel for ships with fixed pitch propeller
Operation profile	Up to 1000 hours per year at a maximum of 20 % of time at full load   average load < 50 %
Construction	Four-stroke diesel with exhaust after-treatment system (SCR), SAE 1 flywheel housing
Cylinders	8 cylinders in V-arrangement, single cylinder heads with wet replaceable cylinder liners
Air system	Single-stage turbocharger with charge air intercooler and wastegate
Cooling system	Seawater cooled charge air cooler and plate heat exchanger by rubber impeller pump
Oil system	Force-feed lubrication by gear pump, lubricating oil cooler in cooling water circuit of the engine
Fuel system	Common Rail injection system with EDC17 control, fuel to DIN EN 590
Auxiliary PTO	PTO for hydraulic pump 16 cm <sup>3</sup> (180Nm)
Alternator	Three-phase generator with rectifier and transistorized governor, 28V, 120A
Starting system	Solenoid-operated electric starter, 24V, 7.0kW
Service	Oil change interval 400 operating hours
Classification	Engine according to classification requirements available => see MAN Marine Configurator

**Exhaust status** IMO Tier III, EPA Tier 3 recreational


<sup>1</sup> Values at rated power

<sup>2</sup> Diesel fuel according to DIN EN 590 (tolerance +5% - ISO 3046), urea solution 32,5% according to ISO 22241 (tolerance +3%)

<sup>3</sup> Values on propeller curve

## D2868LE429 (V8-1000)

A - overall width.....	1157 mm
B - overall length.....	1647 mm
C - overall height.....	1180 mm
D - above crank shaft.....	769 mm
E - length to flywheel.....	1251 mm
Engine weight, dry.....	1780 kg
(depending on the scope of supply)	

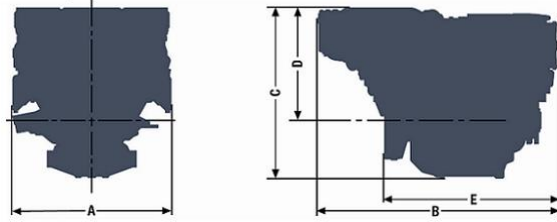

### Combustion parameters <sup>1</sup>

Intake air temperature (max)	45 °C
Intake air vacuum (min/max)	30/60 mbar
Intake air volume flow	3410 m <sup>3</sup> /h
Exhaust gas temperature	411 °C
Exhaust gas volume flow	8010 m <sup>3</sup> /h
Exhaust gas mass flow	4020 kg/h
Exhaust back pressure (min/max) downstream of SCR catalyst	20/80 mbar


### Heat balance <sup>1</sup>

Exhaust gas heat	490 kW
Cooling water heat	550 kW
Intercooler heat	130 kW
Radiation heat	31 kW

### Noise emission (sound power) <sup>1</sup>

Engine surface noise (Lwa)	120,3 dB(A)
Free exhaust noise (Lwa)	101,0 dB(A)

### Specific consumption<sup>2</sup>

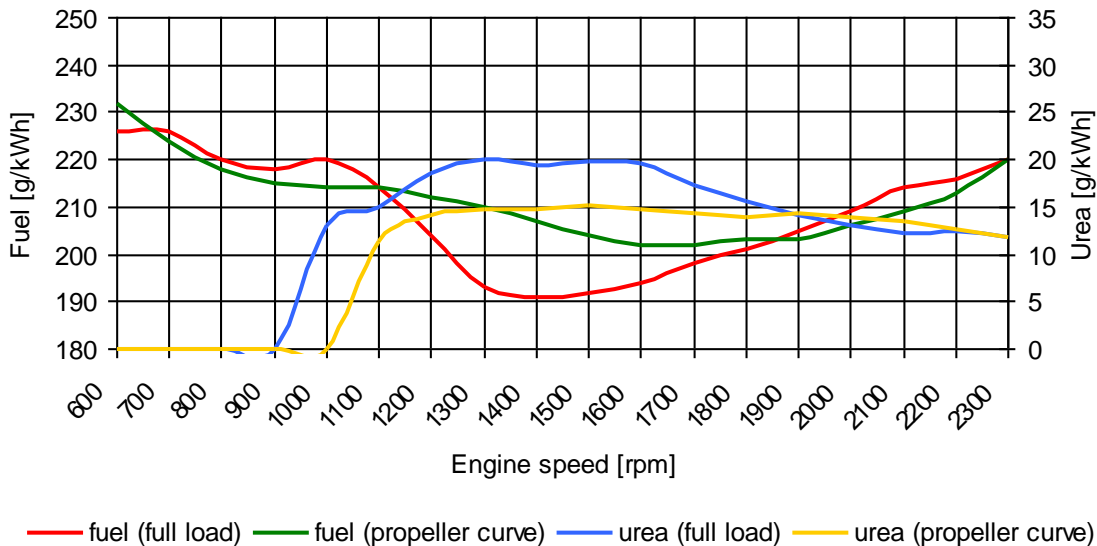

< The rated power is based on reference conditions according to ISO 3046-1 (2002) >

< Intake air temperature, max. 45°C | sea water temperature, max. 32°C >

< Barometric pressure 1000 mbar | air humidity 60% >

< Exponent for propeller curve 2,5 >

**< Engine specifications are subjected to change without prior notice >**

<sup>1</sup> Values at rated power

<sup>2</sup> Diesel fuel according to DIN EN 590 (tolerance +5% - ISO 3046), urea solution 32,5% according to ISO 22241 (tolerance +3%)

<sup>3</sup> Values on propeller curve