



Technical data sheet

25.07.2019

(Version 1)

Marine diesel engine
D2862LE459 (V12-1650)

Performance data

Rated power	1213	kW
Rated power	1650	PS
Speed	2300	rpm
Bore/Stroke	128/157	mm
Displacement	24,24	liter
Rated torque	5036	Nm
Maximum torque	5510	Nm
at speed	1200-2100	rpm
Compression ratio [ε]	17,0	:1
Mean effective pressure	26,11	bar
Mean piston speed	12,04	m/s



Consumption data ²

Specific fuel consumption ¹	215	g/kWh
Absolute fuel consumption ¹	310	l/h
Lowest fuel consumption ³	196	g/kWh
Absolute urea consumption ¹	18	l/h

The engine illustrated may not entirely be identical to production standard engine

Engine description

Application	Main propulsion diesel for ships with fixed pitch propeller
Operation profile	Up to 1000 hours per year at a maximum of 20 % of time at full load average load < 50 %
Construction	Four-stroke diesel, direct injection, exhaust after-treatment system, SAE 1 flywheel housing
Cylinders	12 cylinders in V-arrangement, single cylinder heads with wet replaceable cylinder liners
Air system	Two-stage turbocharger with charge air intercooler and wastegate
Cooling system	Seawater cooled charge air cooler and plate heat exchanger by rubber impeller pump
Oil system	Force-feed lubrication by gear pump, lubricating oil cooler in cooling water circuit of the engine
Fuel system	Common Rail injection system with high pressure pump and EDC control, fuel to DIN EN 590
Auxiliary PTO	PTO for hydraulic pump 16 cm ³ (180Nm)
Alternator	Three-phase generator with rectifier and transistorized governor, 28 V, 120 A
Starting system	Solenoid-operated electric starter, 24 V, 7.0 kW
Service	Oil change interval 400 operating hours, average TBO 5.000 operating hours*
Classification	Engine according to classification requirements available => see MAN Marine Configurator

Exhaust status IMO Tier III

¹ Values at rated power


² Diesel fuel according to DIN EN 590 (tolerance +5% - ISO 3046), urea solution 32,5% according to ISO 22241 (tolerance +3%)

³ Values on propeller curve

*TBO 5.000 operating hours for non or low particulate matters (PM) regulated jurisdictions (IMO, Canada, EU Stage IIIA)

D2862LE459 (V12-1650)

A - overall width.....	1153 mm
B - overall length.....	2139 mm
C - overall height.....	1272 mm
D - above crank shaft.....	808 mm
E - length to flywheel.....	1658 mm
Engine weight, dry.....	2420 kg
(depending on the scope of supply)	

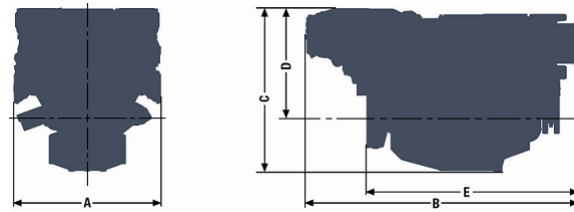

Combustion parameters ¹

Intake air temperature (max)	45 °C
Intake air vacuum (min/max)	30/60 mbar
Intake air volume flow	5000 m ³ /h
Exhaust gas temperature	485 °C
Exhaust gas volume flow	12600 m ³ /h
Exhaust gas mass flow	5650 kg/h
Exhaust back pressure (min/max) downstream of SCR catalyst	20/80 mbar


Heat balance ¹

Exhaust gas heat	750 kW
Cooling water heat	815 kW
Intercooler heat	300 kW
Radiation heat	39 kW

Noise emission (sound power) ¹

Engine surface noise (Lwa)	108,5 dB(A)
Free exhaust noise (Lwa)	107,0 dB(A)

Specific consumption²

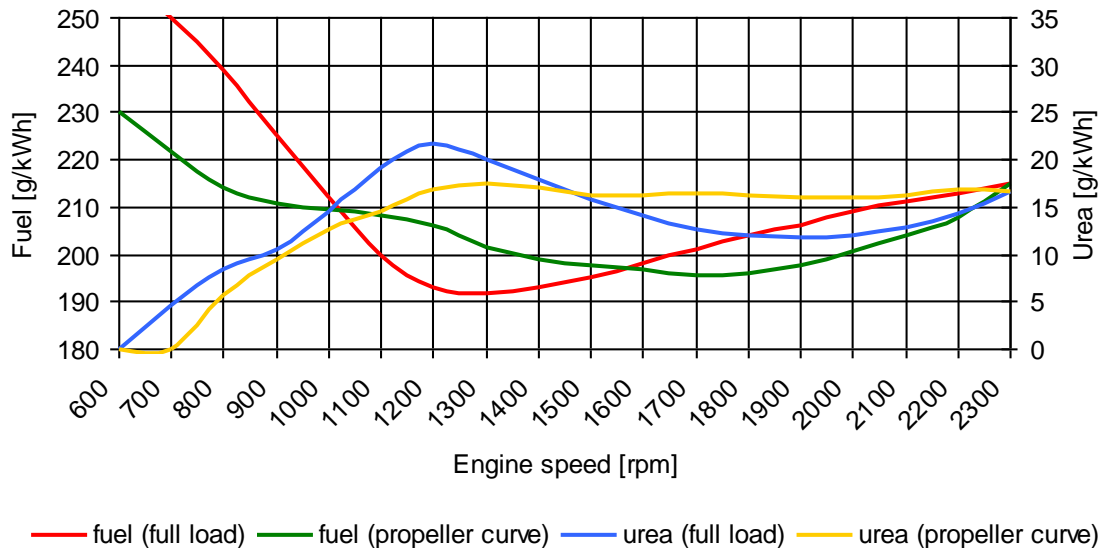

< The rated power is based on reference conditions according to ISO 3046-1 (2002) >

< Intake air temperature, max. 45°C | sea water temperature, max. 32°C >

< Barometric pressure 1000 mbar | air humidity 60% >

< Exponent for propeller curve 2,5 >

< Engine specifications are subjected to change without prior notice >

¹ Values at rated power

² Diesel fuel according to DIN EN 590 (tolerance +5% - ISO 3046), urea solution 32,5% according to ISO 22241 (tolerance +3%)

³ Values on propeller curve

*TBO 5.000 operating hours for non or low particulate matters (PM) regulated jurisdictions (IMO, Canada, EU Stage IIIA)